

OUT OF THE DARKNESS

Shines

Bulbs **THAT LAST
4 EVER**




The Choice
of

LEADERS

FOR ALL TYPES OF

MOTORCYCLES

**BE BOLD!
BE BRIGHT!
BE SEEN!**

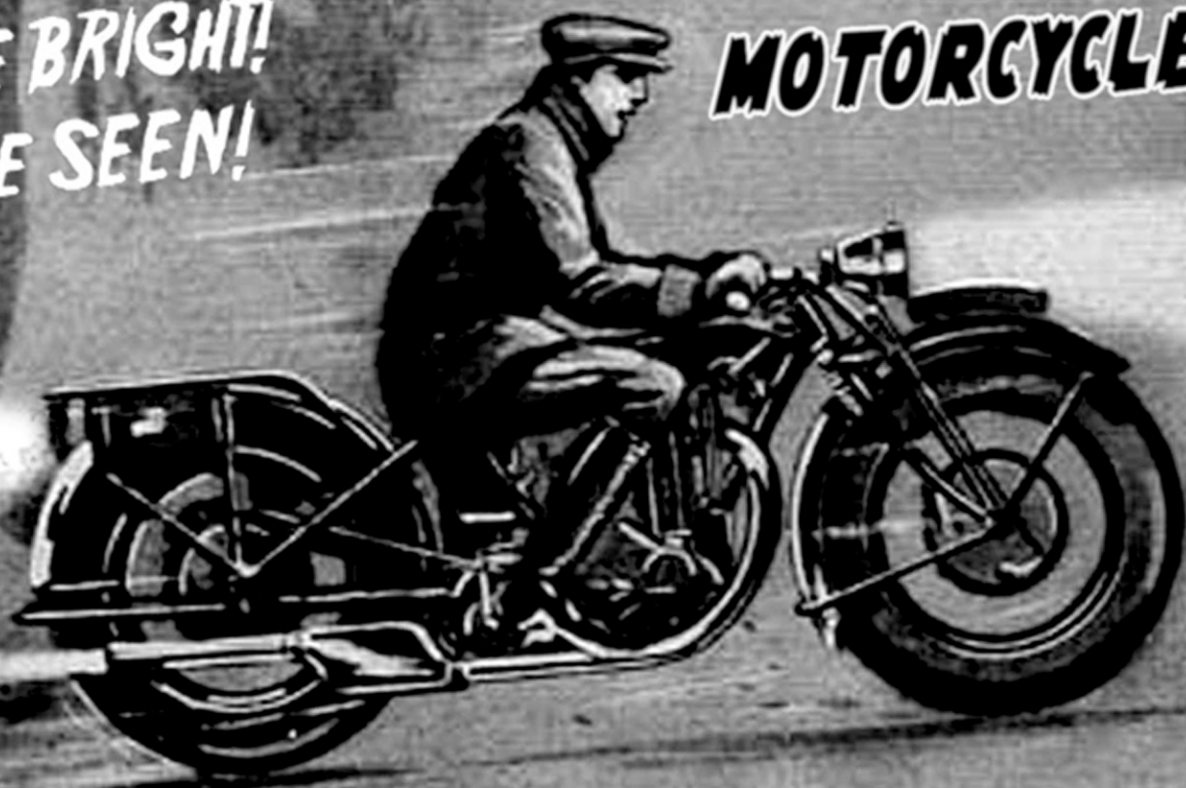

You can pay less elsewhere, but you will not reap the benefits enjoyed by 1000's of satisfied customers. Bulbs That Last 4 Ever utilises the highest quality materials available & is the only constructor that will create a unique lighting system specific to your needs. Visit our website & compare.

The proof is in the Illumination!

www.bulbthatlast4ever.com

LEFT BLANK INTENTIONALLY.

Model: HM2 Conversion Kit For Hondas Made 1969-73

Installation Instructions:

Thank you for purchasing this LED Conversion Kit for your Vintage Honda Taillight. This Kit has been designed for optimum installation in either an OEM or reproduction taillight assemblies found on most Honda motorcycles made from 1969 to 1973 using the taillight assembly style shown in Figure 2.

Before you start to install this LED Taillight Conversion Kit, carefully read and follow these installation instructions. Expect installation to take approximately 10-20 minutes utilizing a #2 Philip screwdriver, other hand tools, power drill with 5/64" drill bit, and a roll of masking tape.

Getting Started:

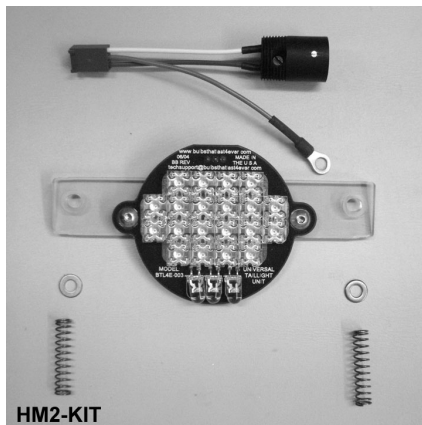


Figure 1

Kit Check List:

1. Qty 1, BLT4E-003 LED Board Mounted to HM2 Bracket
2. Qty 1, Bayonet Cable Connector Assembly
3. Qty 2, Compression Springs
4. Qty 2, SS #8 Round Flat Washers
5. Qty 1, SS #6 Sheet Metal Screw (not shown)

Note: This kit has been supplied with all the necessary items to install this unit. Sometimes these items may differ from any items shown or depicted anywhere in these installation instructions. Items are subject to change without notice at anytime.

Installation:



Figure 2

Disclaimer:

Under no circumstances will Bulbthatlast4ever or its representatives be responsible or liable for any incidental or consequential property damages or personal injuries arising from or in connection with the use or installation of any of the listed foregoing products or devices. Rev. 3/08

Model: HM2 Conversion Kit For Hondas Made 1969-73
Installation Instructions:

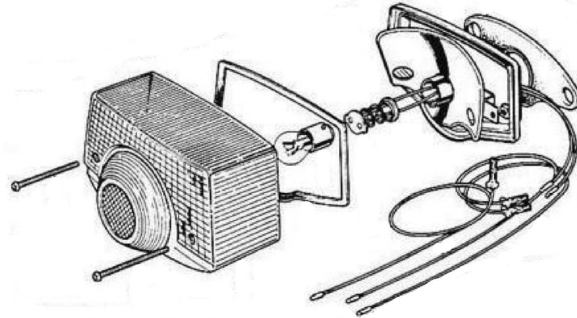


Figure 3

1. Start the installation by disassembling the taillight by removing the following, the screws, lens, lens packing and bulb as shown in Figure 3. *Note: Sometimes the lens packing is stuck onto the lens.*



Figure 4

2. Using a power drill with a 5/64" (2 mm) drill bit, then drill a hole into the reflector in the approximate location as shown in Figure 4.

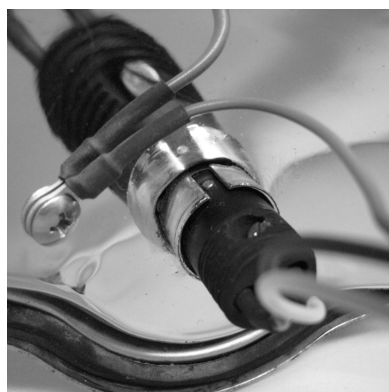


Figure 5

3. Using the sheet metal screw, pass the screw through the ring terminal on the green wire of the Bayonet Cable Assembly. Then proceed to put the screw's tip into the drilled hole and tighten the screw snugly against the reflector plate. Then install the Bayonet adaptor into the bulb socket with the brass pin into the upper socket slot, as shown in Figure 5. Firmly push in the adaptor and twist to lock into position.

Disclaimer:

Under no circumstances will Bulbthatlast4ever or its representatives be responsible or liable for any incidental or consequential property damages or personal injuries arising from or in connection with the use or installation of any of the listed foregoing products or devices. Rev. 3/08

Model: HM2 Conversion Kit For Hondas Made 1969-73
Installation Instructions:

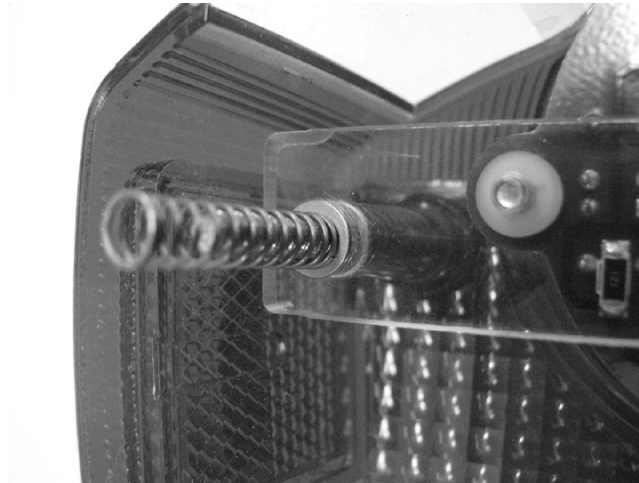


Figure 6

4. Install the 2 screws back into the lens and place a piece of masking tape over both of the screw heads; this will help prevent the screws from falling out while handling the lens. Install the LED Board/Bracket Assembly's bracket holes over the screw studs, and then install a washer followed by a spring for each screw as shown in Figure 6.

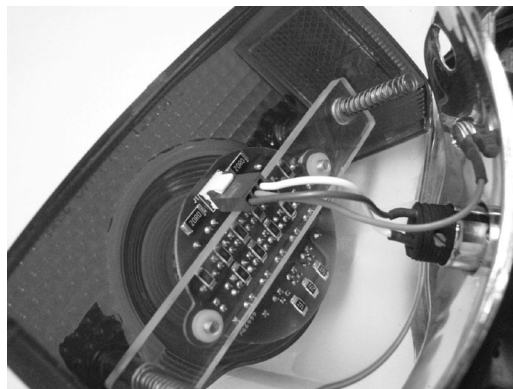


Figure 7

5. Carefully bring the lens assembly close enough to plug-in the bayonet cable assembly into the header connector on the LED Board as shown in Figure 7. Firmly push the connector onto the header until it's firmly seated. Mate the lens to the reflector plate; firmly squeeze the lens to plate before removing the tape to start the screws. Once both screws have been started, tighten them to secure the lens, be careful not to over-tighten them, otherwise they will be damaged. Your LED Taillight is now ready for use.

Product Support:

On-line Technical Support available by e-mail at techsupport@bulbthatlast4ever.com

Repairs/Returns: Please do not return the unit to the retailer that it was purchased from, they will not be able to honor our warranty. Please visit this webpage <http://bulbthatlast4ever.com/returns.html> first or call our Help Line at (1) 818-239-2683 for returning instructions.

Warranty Info: Please refer to the attached "Product Warranty Agreement" for more details.

Disclaimer:

Under no circumstances will Bulbthatlast4ever or its representatives be responsible or liable for any incidental or consequential property damages or personal injuries arising from or in connection with the use or installation of any of the listed foregoing products or devices. Rev. 3/08



Product Warranty Agreement:

Bulbthatlast4ever warrants all our products, standard, custom, or otherwise against defects in material or workmanship as follows:

1. For a period of 365 days from the date of purchase if this Product is determined to be defective, Bulbthatlast4ever will repair the Product at no charge. After the 365 days period, you must pay a \$10 "Evaluation Charge", labor rate of \$15 per hour, and cost of replacement components. This warranty does not cover cost incurred in connection with the use of un-approved aftermarket accessories used with this Product.
2. To obtain warranty service, you must fill out a "Request for Repair" Form available on-line at <http://www.bulbthatlast4ever.com/returns.html> or call our Help Line at (1) 818-239-2683 for a "Return Merchandise Authorization" number and deliver the Product freight prepaid, in either its original packaging or packing affording an equal degree of protection, to Bulbthatlast4ever as per the information provided on the "Request for Repair" form or provided to you over the phone.

This warranty does not cover the following items listed herein, any implications of following items "WILL VOID" the Product warranty immediately and indefinitely, but are not limited to the listed below:

- Cosmetic damage or damage due to acts of God, accident, misuse, abuse, negligence, commercial use, improper use or maintenance, connection to improper voltage supply, or attempted repair by anyone other than a facility authorized by Bulbthatlast4ever to service this Product.
- Unauthorized customer or end-user modifications, such as grinding, filing, cutting, drilling, or by any other mechanical means with intent to alter the shape or size of the printed circuit board assembly/ies.
- Installation of non-factory approved replacement parts soldered into the printed board assembly/ies such as but not limited to resistors, LEDs, headers, or any other electronic component active or passive used in or on our products. In the case of printed circuit board assembly/ies with factory omitted components, inserting and soldering components or anything into these locations.
- Improper handling of Class I or Class II ESD (Electro-Static Discharge) rated components as per the individual component manufactures handling procedures or datasheet.
- Any damage received to any of the electrical pathways (traces) of the printed circuit board assembly/ies by one more but not limited to the following means, electrical overload, mechanical interference, environmental conditions, deliberate damage inflicted by human or any man-made machine, and/or improper installation of the product.
- Any damage received to the printed circuit board assembly/ies that has resulted due to contact with any type of liquid or fluid, natural or otherwise, but not limited to the following examples, water (fresh or salt-water), gasoline (petrol), any petroleum based products, solvents or cleaners used outside of the manufacturing process.
- Damages that are sustained by accidental damaged such as being involved in a motor vehicle accident of any kind. Accidental dropping the product onto any surface harder than the printed circuit board assembly/ies or its components.
- Damages that may occur from a vehicle's electrical or charging system that is found not to be properly functional to the manufactures specifications.

Proof of purchase in the form of a bill of sale, receipt invoice, or vendor sales slip which is evidence of that the unit is within the Warranty period must be presented to obtain warranty service.

Bulbthatlast4ever reserves the right to refuse any product warranty based on any reason listed above. Bulbthatlast4ever also reserves the right to honor or refuse any warranty repair for any reason based upon any signs or suspicion of product tampering to the above-mentioned Product.